


- Available in LED & Incandescent
- White Powder Coated Aluminum
- Ceiling Mount Only
- UL Listed for Damp Locations
- Standard Pack QTY: 8

## 11" DOME



**FD331**

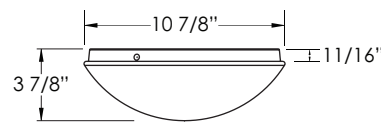

RoHS compliant



### EXAMPLE # FD331-LE800W-WWM

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS	
<b>FD331</b>	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR***	<b>W-White</b>	<b>ACRYLIC W-White</b>	<b>M-Motion Sensor</b>	
	<b>LE800</b> - 13W Power Input CRI 80 (TYP) >65 Lumens Per Watt**				<b>W-900lm 3000K C-1000lm 4000K</b>
	<b>LE1200</b> - 14W Power Input CRI 80 (TYP) >80 Lumens Per Watt**				<b>W-1350lm 3000K C-1400lm 4000K</b>
	<b>LE1800</b> - 23W Power Input CRI 80 (TYP) >80 Lumens Per Watt**				<b>W-1850lm 3000K C-1900lm 4000K</b>
	<b>INCANDESCENT, MEDIUM BASE, 120V I40-1 X 40W Max</b>	<b>W-White</b>	<b>ACRYLIC W-White</b>	<b>LED LAMP, 3 YEAR WARRANTY DIMMABLE, ENERGY STAR</b> <b>LWE-A19/E26, 2700K LCE-A19/E26, 4000K</b>	

\*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST    \*\*ESTIMATED FROM LED SOURCE    \*\*\*EXCLUDES LE1800 MODEL



Scan the QR code to the left to access the Energy Star qualified product list.

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.