


- Available in LED, Incandescent & GU24
- Molded of Durable Non-Corrosive UV Resistant Resins
- Fits Most 3" Diameter Posts
- UL Listed for Wet Locations
- Standard Pack QTY: 1

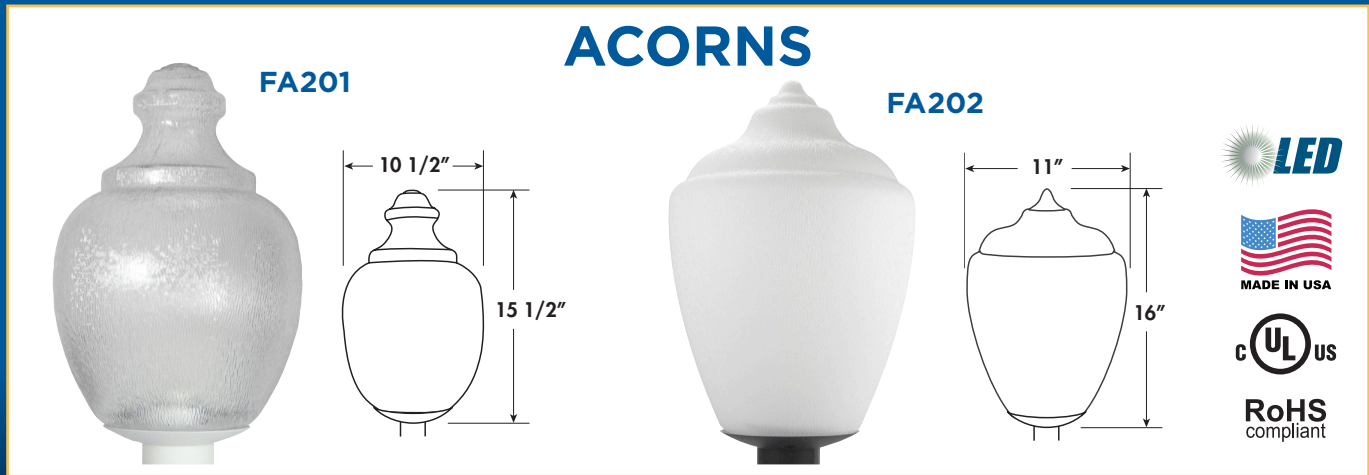

EXAMPLE # FA201-G13-BCL

| STYLE # | LIGHT SOURCE | BODY | DIFFUSER | OPTIONS |
|------------------------------|--|-------------------------------------|---|--|
| FA201 FA202 | EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE LE800 - 13W Power Input CRI 80 (TYP) >65 Lumens Per Watt** LE1200 - 14W Power Input CRI 80 (TYP) >80 Lumens Per Watt** LE1800 - 23W Power Input CRI 80 (TYP) >80 Lumens Per Watt** | W -White B - Black | ACRYLIC A -Clear Textured POLYCARBONATE C -Clear Textured POLYETHYLENE W -White Textured | N/A |
| | INCANDESCENT, MEDIUM BASE, 120V I150 -1 X 150W Max | W -White B - Black | ACRYLIC A -Clear Textured POLYCARBONATE C -Clear Textured POLYETHYLENE W -White Textured | LED LAMP, 3 YEAR WARRANTY, DIMMABLE LWE -A19/E26, 2700K LCE -A19/E26, 4000K |
| | GU24 BASE, 120V G13 -1 X 13W G18 -1 X 18W G23 -1 X 23W G26 -1 X 26W or 27W G32 - 1 X 32W G42 - 1 X 42W | W -White B - Black | ACRYLIC A -Clear Textured POLYCARBONATE C -Clear Textured POLYETHYLENE W -White Textured | L -CFL, 2700K |

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.

For more information contact our sales department at 1-800-325-7364 or visit www.interglobal-inc.com