

# ELECTRONIC BALLAST

## IG130ELSK

- One Lamp
- Multi-Watt
- Small Case Size
- Lightweight
- Versatile
- Energy Saving



### Features & Benefits

Wide lamp versatility, suitable for one F25T8, F25T12, F30T8, F30T12, \*FC12T9(32W), \*F32T8, \*F34T12, \*F40T8, \*F40T10, or \*F40T12 lamp

Class A Sound Rating

End of Lamp Life Protection

More efficient compared to standard magnetic ballasts

Lead wires do not interfere with mounting holes

Eliminates strobing

Thermal potting

Metal enclosure


Rapid Start




### SPECIFICATIONS

- Operating Voltage: 120 VAC  $\pm$  10%
- Frequency: 50/60Hz
- Protection: Class P Inherent Thermal Protection
- Regulatory Approvals: UL, CUL Listed
- Min. Starting Temp: 0°F (-17.78°C)  
\* 32°F Min. Starting Temp
- Max. Case Temp: 158°F (75°C)
- Over Current: Fuse
- Type 1 Outdoor, Normal Power Factor

#### DIMENSIONS

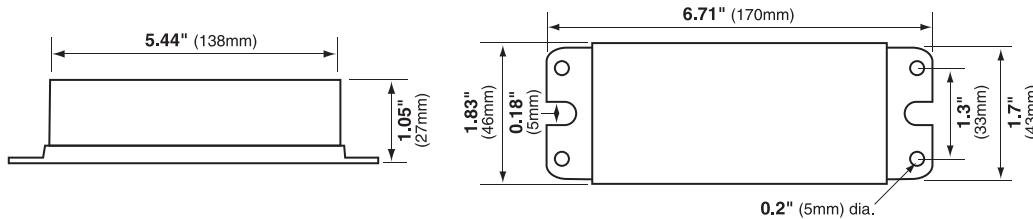

#### WIRING DIAGRAM



Weight: 13 oz. Case Quantity: 40pcs Case Weight: 29 lbs Standard Lead Length: black/white-24" blue/red-34"

Line Voltage	Lamp Type	Line Current	Input Power	Power Factor	Crest Factor	Ballast Factor	THD Percent	Min Start Temp
120	★ F25T8	0.45	22.7	0.50	1.39	0.90	117.9	0°F
120	F25T12	0.45	26.8	0.50	1.54	1.01	116.2	0°F
120	F30T8	0.45	27.3	0.50	1.33	0.90	117.4	0°F
120	F30T12	0.45	27.6	0.50	1.50	0.91	117.3	0°F
120	★ F32T8	0.49	27.8	0.53	1.32	0.80	118.8	32°F
120	F34T12	0.46	27.9	0.50	1.50	0.81	117.5	32°F
120	F40T12	0.56	28.0	0.50	1.40	0.73	118.4	32°F

★ Refer to the NEMA/ALA BALLAST MATRIX in the back of the Fluorescent Ballast section of this catalog for more Energy Star Information.

For warranty information refer to Inter-Global's ELECTRONIC BALLAST LIMITED WARRANTY in the back of the Fluorescent Ballast section of this catalog.