

ELECTRONIC BALLAST

IG213-20ELSK

- Two Lamp
- Multi-Watt
- Small Case Size
- High Heat
- Lightweight
- Energy Saving



Features & Benefits

Wide lamp versatility, suitable for two F15T8, F17T8, F20T12, CFQ13W/G24q, CFTR13W/GX24q, CFT13W/2GX7, CFQ18W/G24q, CFTR18W/GX24q, FT18W/2G11, or CFM18W/2G10 lamps

Class A Sound Rating

End of Lamp Life Protection

More efficient compared to standard magnetic ballasts

Eliminates strobing

Thermal potting

Metal enclosure


Rapid Start




SPECIFICATIONS

- Operating Voltage: 120 VAC \pm 10%
- Frequency: 50/60Hz
- Protection: Class P Inherent Thermal Protection
- Regulatory Approvals: UL, CUL Listed
- Over Current: Fuse
- Min. Starting Temp: 0°F (-17.78°C)
- Max. Case Temp: 194°F (90°C)
- FCC, 47 CFR, Part 18 Consumer Limits
- Type 1 Outdoor, Normal Power Factor

DIMENSIONS

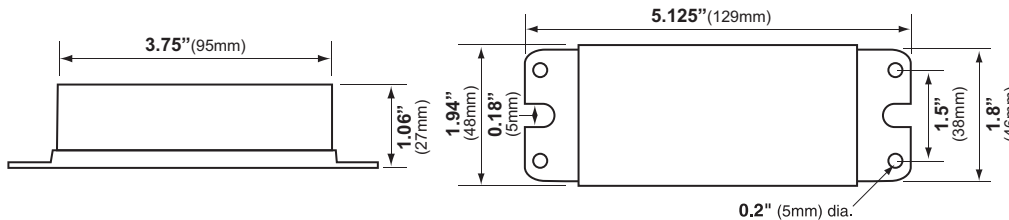

WIRING DIAGRAM



Weight: 9.6 oz. Case Quantity: 40pcs Case Weight: 32 lbs Standard Lead Length: black/white-12" blue/red-27" yellow-27"

Line Voltage	Lamp Type	Line Current	Input Power	Power Factor	Crest Factor	Ballast Factor	THD Percent	Min Start Temp
120	F15T8	0.323	20.3	0.52	1.7	0.58	114	0°F
120	★ F17T8	0.446	21.3	0.52	1.5	0.56	114.2	0°F
120	F20T12	0.338	22.2	0.55	1.7	0.50	114.2	0°F
120	★ CFQ13W/G24q	0.40	23.2	0.53	1.48	0.83	114.4	0°F
120	CFTR13W/GX24q	0.38	23.9	0.52	1.6	0.84	114.3	0°F
120	★ CFT13W/2GX7	0.30	17.4	0.50	1.49	0.66	114.5	0°F
120	★ CFQ18W/G24q	0.42	26.7	0.545	1.44	0.76	115.4	0°F
120	CFTR18W/GX24q	0.44	28.1	0.53	1.5	0.75	114.9	0°F
120	FT18W/2G11	0.35	21.4	0.508	1.7	0.58	115	0°F
120	CFM18W/2G10	0.32	20.0	0.50	1.7	0.56	115.3	0°F

★ Refer to the NEMA/ALA BALLAST MATRIX in the back of the Fluorescent Ballast section of this catalog for more Energy Star Information.

For warranty information refer to Inter-Global's ELECTRONIC BALLAST LIMITED WARRANTY in the back of the Fluorescent Ballast section of this catalog.