

# IG226-32ELSK

- Two Lamp
- Multi-Watt
- Small Case Size
- High Heat
- Lightweight
- Energy Saving



## Features & Benefits

Wide lamp versatility, suitable for two CFQ26W/G24q, CFTR26W/GX24q, or CFTR32W/GX24q lamps

Class A Sound Rating

End of Lamp Life Protection

More efficient compared to standard magnetic ballasts

Lead wires do not interfere with mounting holes

Eliminates strobing

Thermal potting

Metal enclosure


Rapid Start




## SPECIFICATIONS

- Operating Voltage: 120 VAC  $\pm$  10%
- Frequency: 50/60Hz
- Protection: Class P Inherent Thermal Protection
- Regulatory Approvals: UL, CUL Listed
- Min. Starting Temp: 0°F (-17.78°C)
- Max. Case Temp: 194°F (90°C)
- Over Current: Fuse
- FCC, 47 CFR, Part 18 Consumer Limits
- Type 1 Outdoor, Normal Power Factor

### DIMENSIONS

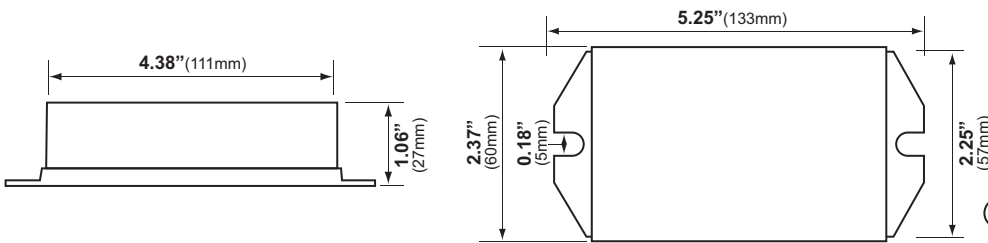

### WIRING DIAGRAM

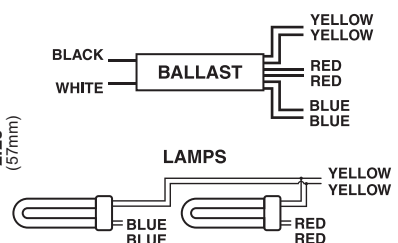

Weight: 14 oz. Case Quantity: 40pcs Case Weight: 29.5 lbs Standard Lead Length: black/white-12" blue/red/yellow-12"

Line Voltage	Lamp Type	Line Current	Input Power	Power Factor	Crest Factor	Ballast Factor	THD Percent	Min Start Temp
120	★CFQ26W/G24q	0.57	44.5	0.513	1.46	0.86	119.6	0°F
120	★CFTR26W/GX24q	0.56	44.7	0.513	1.49	0.77	119.9	0°F
120	★CFTR32W/GX24q	0.62	48.2	0.521	1.43	0.69	118.9	0°F

★ Refer to the NEMA/ALA BALLAST MATRIX in the back of the Fluorescent Ballast section of this catalog for more Energy Star Information.

For warranty information refer to Inter-Global's ELECTRONIC BALLAST LIMITED WARRANTY in the back of the Fluorescent Ballast section of this catalog.