

ELECTRONIC BALLAST

IG5-13ELS

- One Lamp
- Multi-Watt
- Small Case Size
- Lightweight
- Versatile
- Energy Saving



Features & Benefits

Wide lamp versatility, suitable for one F8T5, F13T5, CFT5W/2G7, CFT7W/2G7, or CFT9W/2G7 lamp

Class A Sound Rating

End of Lamp Life Protection

More efficient compared to standard magnetic ballasts

Lead wires do not interfere with mounting holes

Eliminates strobing

Thermal potting


Metal enclosure

Rapid Start


SPECIFICATIONS

- Operating Voltage: 120 VAC \pm 10%
- Frequency: 50/60Hz
- Protection: Class P Inherent Thermal Protection
- Regulatory Approvals: UL, CUL Listed
- Over Current: Fuse
- Max. Case Temp: 158°F (75°C)
- FCC, 47 CFR, Part 18 Consumer Limits
- Type 1 Outdoor, Normal Power Factor

DIMENSIONS

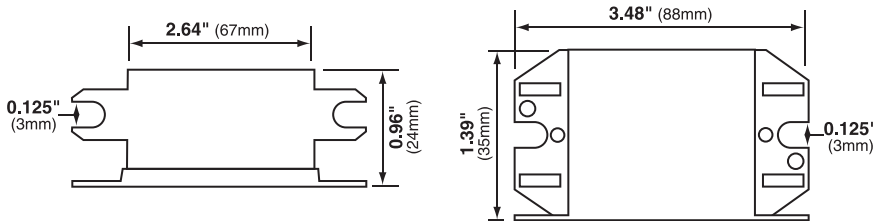

WIRING DIAGRAM

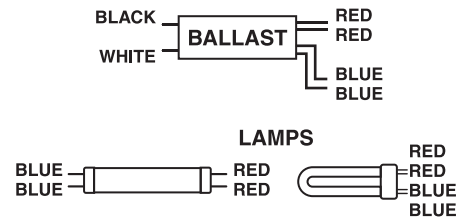

Weight: 5.2 oz. Case Quantity: 50pcs Case Weight: 16 lbs Standard Lead Length: black/white-12" blue/red-18"

Line Voltage	Lamp Type	Line Current	Input Power	Power Factor	Crest Factor	Ballast Factor	THD Percent	Min Start Temp
120	F8T5	0.12	7.4	0.53	1.4	0.55	117.5	0°F
120	F13T5	0.16	10.6	0.56	1.5	0.65	101.5	32°F
120	CFT5W/2G7	0.9	5.2	0.50	1.6	0.84	136.1	0°F
120	CFT7W/2G7	0.11	6.7	0.52	1.5	0.82	123.2	0°F
120	CFT9W/2G7	0.12	7.5	0.53	1.5	0.81	117.4	0°F

For warranty information refer to Inter-Global's ELECTRONIC BALLAST LIMITED WARRANTY in the back of the Fluorescent Ballast section of this catalog.