
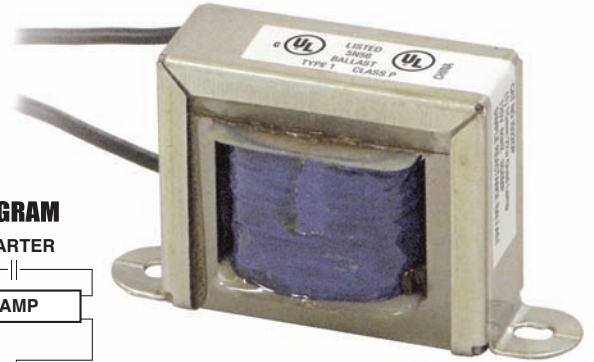



# OPEN CORE & COIL BALLAST SINGLE LAMP

- Product Specifications listed below
- Magnetic Ballast Warranty Info in back of this section



CASE STYLES	A	B	C	D	E
1	2 11/16"	2 3/16"	1/2"	1 13/32"	1 11/16"
1A	2 1/2"	2"	9/16"	1 13/32"	1 11/16"
1B	2 1/2"	2"	21/32"	1 13/32"	1 11/16"
1C	2 9/16"	2"	27/32"	1 13/32"	1 11/16"
1D	2 11/16"	2 13/32"	3/4"	1 17/32"	1 31/32"
1E	2 7/8"	2 9/16"	1 1/10"	1 21/32"	1 31/32"

### WIRING DIAGRAM



15" LEAD LENGTHS FOR STOCKED BALLASTS. CUSTOM LEAD LENGTHS AVAILABLE. CALL FOR DETAILS.

Lamp Data		Part #	Circuit Electrical Data						Physical Data			Certification
Watts	Model#		Volts	Hz	Line Current (Amps)	Input (Watts)	Minimum Starting Temp	Sound Rating	Case Style	Std. Pkg	Weight	
8	F8T5 bulb	†IG80	120	60	0.150	10.4	32°F	A	1	100	28lbs.	UL-CUL
8&9	F8T5 bulb CFT9W/G23	†IG80R	120	60	0.150	10.2	32°F	A	1	100	28lbs.	UR-CUR
8&9	F8T5 CFT9W/G23	*†IG80P	120	60	0.150	10.4	32°F	A	1	100	28lbs.	UL-CUL
7&9	CFT7W/G23 DULUX7 F7TT F7BX CFT9W/G23	IG90	120	60	0.175	10.4	7W-5°F/9W25°F	A	1A	100	28lbs.	UR-CUR
7&9	CFT7W/G23 CFT9W/G23 DULUX9 F9TT F9DTT F9BX	*IG90P	120	60	0.175	10.4	7W-5°F/9W25°F	A	1A	100	37lbs.	UL-CUL
13	CFT13W/GX23 CFQ13W/GX23 F13TT F13DTT F13BX	*IG130P	120	60	0.300	13.6	32°F	A	1C	50	28lbs.	UL-CUL
13	CFT13W/GX23 CFQ13W/GX23	†IG130S	120	60	0.300	15	32°F	A	1B	50	33lbs.	UR-CUR
22	PL22	*†IG220P	120	60	0.350	22	32°F	A	1D	100	57lbs.	UL-CUL
28	PL28	*†IG280P	120	60	0.560	29	32°F	A	1E	50	46lbs.	UL-CUL

\* Ballast Class P † Non-stocked, Special Order, Call for details

NOTE: All Ballasts Type 1, Outdoor

