
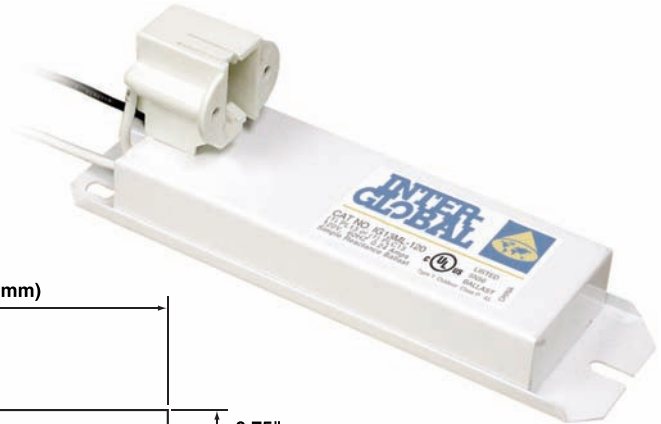


# BALLAST SINGLE LAMP

## IG13 Ballast

- A reset able thermal disconnect from Texas Instruments
- Standard lead length 13" 105°C 18AWG wire.
- Normal Power Factor or High Power Factor
- Suitable for PLC Quad 13W lamp.
- PL 13 Lamp
- Magnetic Ballast Warranty Info in back of this section

UL and CUL listed

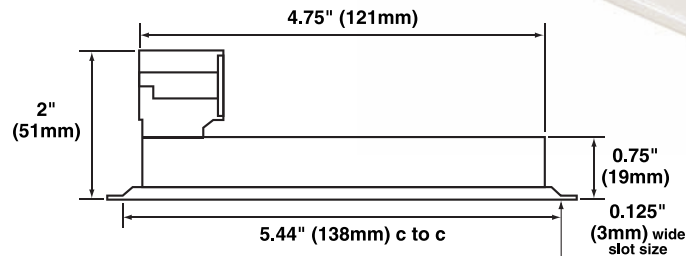

Wattage	Circuit Volts	Catalog Number	Type	Power Factor	Ballast Factor	Input Current	Sound Rating	Min. Start Temp
13	120	IG13ML-120	MAG.	0.67 (NPF)	85.1	0.30	A	32°F
13	120	IG13MH-120	MAG.	1.00 (HPF)	85.1	0.15	A	32°F